


# FLOS

03.8940.14A Black/White

## Light Shadow Adjustable No Trim 12 Spots Optic Spot

Designed by FLOS Architectural

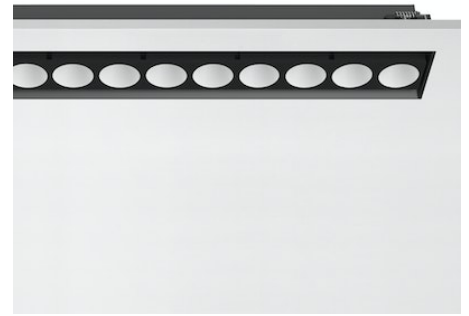

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Ilcos	No
Number of heads	1
Power (W)	32.4
Source flux (lm)	3240
System flux (lm)	2724

### Physical

Colour	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Recessed depth (mm)	75
Length (mm)	429
Net weight (kg)	0.66
IP internal	20
IP external	20

### Drawing Thumbnail

#### Download

Mounting instructions [↓ ZIP](#)

#### Photometric Files

LDT / IES [↓ ZIP](#)

#### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

 Bim [↓ ZIP](#)



## Schematic light drawing



Beam Angle: 10°

h(m)	E(lx)	D(m)
1	49838	0.17
2	12459	0.35
3	5538	0.52
4	3115	0.70
5	1994	0.87

Luminous flux Luminaire  
2724 lm (EXTREME CUT OFF)

### Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10

### Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220.00
Alternating current voltage (Vac)	230
LED voltage Vf (Vdc)	36
Driver	Remote included
Dimmable	No
Emergency type	No

### Notes

It requires a pre-installation frame, to be ordered separately.

## Accessories & Power Supply



REQUIRED  
Frame

Installation

08.0518.00

Pre-installation No Trim Frame  
12L Fix Adjustable



OPTIONAL  
Accessory

Mounting

08.0059.90

Accessory for mounting of No  
Trim Adjustable continuous line.