


# FLOS

03.9266.40BDA White/Black

## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood UPGRADE


Designed by FLOS Architectural, 2022

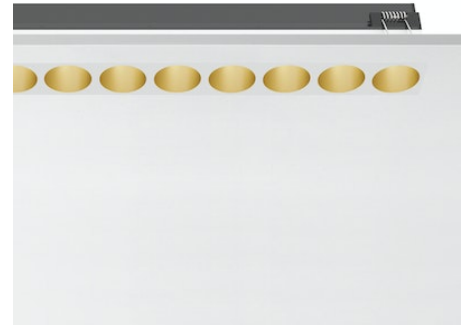

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

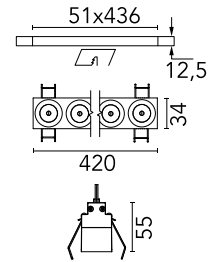

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Number of heads	1
Power (W)	32.4
Source flux (lm)	3240
System flux (lm)	2610

### Physical

Colour	White/Black
Trim	No
Orientation	Fixed
Recessed depth (mm)	75
Length (mm)	420
Net weight (kg)	0.66
IP internal	20

### Download

[Mounting instructions](#) [↓ PDF](#)

[Mounting instructions](#) [↓ PDF](#)

### Photometric Files

[LDT / IES](#) [↓ ZIP](#)


### Technical Drawings

[2D](#) [↓ ZIP](#)

[3D](#) [↓ ZIP](#)



## Schematic light drawing



Beam Angle: 33°

h(m)	E(lx)	D(m)
1	8160	0.60
2	2040	1.19
3	907	1.79
4	510	2.39
5	326	2.99

8164 cd

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	33
Beam angle C90-270 (°)	33


## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220
Forward voltage (V)	34.8
LED current (mA)	900
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)


## Notes

It requires a pre-installation frame, to be ordered separately.

## Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

## Accessories & Power Supply




REQUIRED  
Frame

Installation

08.0513.00

Pre-installation No Trim Frame  
12L Fix

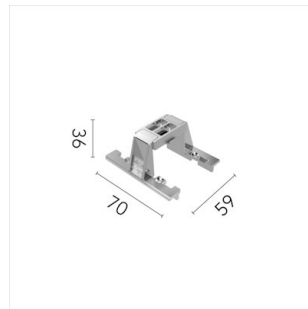

OPTIONAL  
Accessory

Mounting

08.0052.90

Accessory for mounting of No  
Trim Fix continuous line.