


# FLOS

05.0616.14 Black/Black

## Light Shadow Fixed Trim 4 Spots Square Optic Medium NEW

Designed by FLOS Architectural, 2022

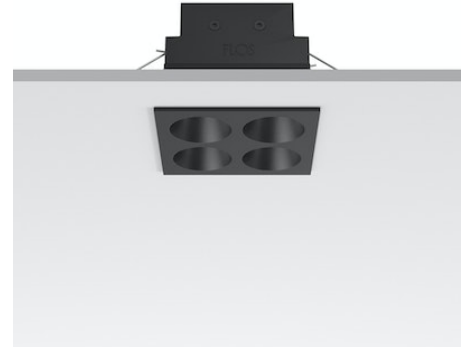


875lm - 3000K - CRI> 90

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V). Pre-installation frame not required.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

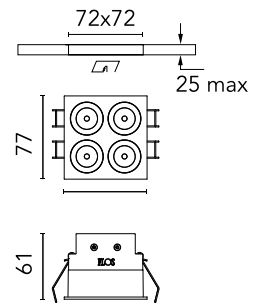


### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
LED type	Power LED
Number of heads	1
System power (W)	10.8
Source flux (lm)	0
System flux (lm)	875

### Physical

Colour	Black/Black
Trim	Yes
Orientation	Fixed
Net weight (kg)	0.34
Package height (mm)	16
Package width (mm)	14
Package length (mm)	21
IP internal	20
IP external	55

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle: 22°

h(m)	E(lx)	D(m)
1	5981	0.39
2	1495	0.78
3	665	1.17
4	374	1.56
5	239	1.95

Luminous flux luminaire  
875 lm (EXTREME CUT OFF)

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
LED Life / Failure Ratio	L80B10

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	900
Driver	Remote included
Dimmable	No
Dimming type	Non Dimmable

## Ecodesign and Energy Labelling



Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional