


FLOS

03.5334.AN Black


In-Finity 25 mm

Designed by FLOS Architectural, 2022

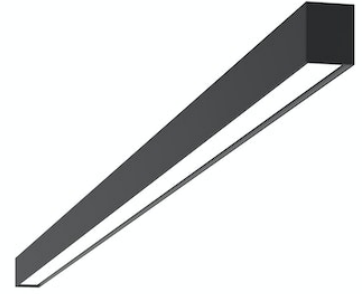

57.6W - 3024lm - 3000K - CRI> 90 - Beam° 91

LED profile for linear lighting, only 25 mm wide. Available in surface mounted versions, with possibility of suspended installation by means of a dedicated kit. Drivers not included.

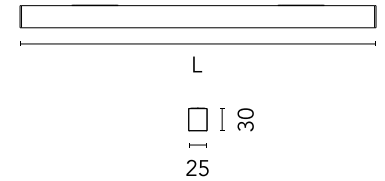

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Surface and suspension
Environments	Indoor dry location
LED type	Top LED
Number of heads	1
Power (W)	57.6
System power (W)	58.2
Source flux (lm)	6309
System flux (lm)	3024

Physical

Colour	Black
Orientation	Fixed
Length (mm)	3000
Net weight (kg)	1.56
Package volume (m3)	0.02
IP internal	20

Download

[Mounting instructions](#) PDF

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) ZIP


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Beam Angle: 91°

h(m)	E(lx)	D(m)
1	1275	2.04
2	319	4.07
3	142	6.11
4	80	8.15
5	51	10.18

Photometric


Lighting type	Direct
CCT (K)	3000
CRI>	90
LED Life / Failure Ratio	L90B50 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	91
Beam angle C90-270 (°)	102

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote
Dimmable	No
Dimming type	Non Dimmable

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



REQUIRED
Accessory

Installation

08.0131.40

Endcap for In-Finity 25 mm



REQUIRED
Power supply

Electrical

60.9516

Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply

Electrical

60.9515

Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9705

Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



OPTIONAL
Accessory

Installation

08.0139.00

Suspension Kit for In-Finity
25mm