
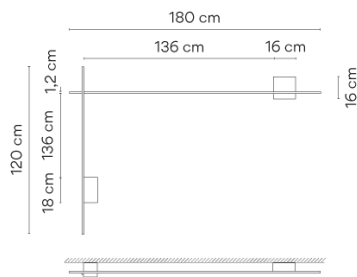


2615

Design By Arik Levy

Wall light that marks coordinates with a rectilinear language, connects points of light in space, relates planes and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

Model Sheet

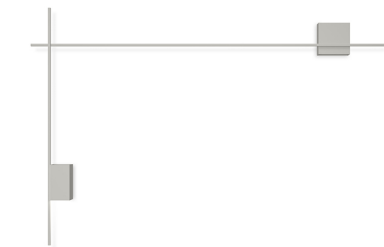

Finish


- 21 Black Grey
NCS S 7000-N
- 15 Grey L2
NCS S 2500-N

LED temperature color 3000 K / 3500 K / 4000 K

Dimming DALI / 1-10V / CASAMBI




Installation type Surface Canopy

Materials Body: Aluminum
Diffuser: Polycarbonate
Profile: Aluminum

LED  CRI>90
3000 K / 3500 K / 4000 K

Driver Constant Voltage 110-240 V V
50-60 Hz HZ

Remarks Only one main input by square box
16x16cm.

  **Dimmable** **LED**
IP20 **Multi-volt** **50-60Hz** 


Application Wall Lamps

Packaging 2 Box
0.224 m x 0.325 m x 0.37 m
Gross weight 4.6
Net weight 2.55
Vol. 0.0361

Lighting effect

General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric Data

Efficiency 100.00%
Coordinate System CG
Total Flux 378.81 lm
Maximum Value 438.41 cd/klm

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com